Design and Simulation of Micro-Power System of Renewables

Charles Kim, Ph.D.

Howard University, Washington, DC USA

- Citation: Charles Kim, "Lecture notes on Design and Simulation of Micro-Power Systems of Renewables", 2013. Washington, DC. Available at <u>www.mwftr.com</u>
- Note: This lecture note is a compilation of a 5-day lecture given at the Korean University of Technology Education in January 2013.

3. Micro Grid and Micro-Power System Concept

Charles Kim, Ph.D.

Howard University, Washington, DC USA


January 21, 2012

Microgrid

- Hicrogrids incorporate distributed energy generation, both from renewable as well as fossil fuel power sources, into the larger electrical distribution system.
- Hicrogrids can be either operated in conjunction with, or "islanded" from, the utility power grid.
- Hicrogrids are utilized in a variety of settings including commercial applications, community/utility deployments, institutional power systems, military installations, and off-grid microgrids that provide electricity to remote villages and other sites.
- Hike Research reported that more than 160 microgrid projects are currently active around the world, with power generation capacity totaling more than 1.2 gigawatts (GW).
- Here up to 2009: majority of microgrids have been pilot projects and/or research-related experiments.
- ₩ 2011: IEEE islanding standards in 2011

Micro Grid Overview

- Interconnected network of distributed energy systems (loads/resources) that can function connected to or separate from grid
 - During a grid disturbance, a micro grid isolates itself from the utility seamlessly with no disruption to loads within;
 - automatically resynchronizes and reconnects to grid seamlessly when grid conditions return to normal
- Existing projects
 - CERTS Micro grid Test Bed (AEP) -Testing started 11/06
 - GE demo -Advanced controls, energy management and protection technologies
 - US Army CERL/Sandia Labs Energy Surety Project -Controls, optimization of resources and storage
 - More than 160 Microgrid project are currently Active around the world [as of May 2011]

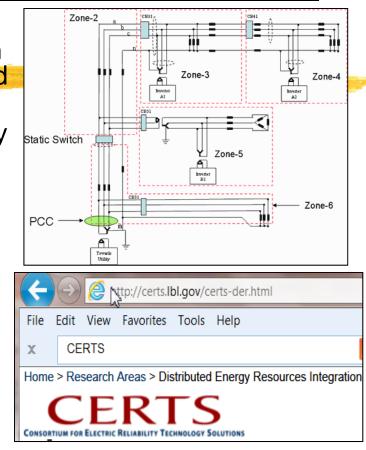



US Army Corps of Engineers.

Engineer Research and Development Center

DOE Microgrid Perspective - 2012


Befinition (by Microgrid Exchange Group): "A microgrid is a group of interconnected loads and distributed energy resources within clearly defined electrical boundaries that acts as a single controllable entity with respect to the grid. A microgrid can connect and disconnect from the grid to enable it to operate in both grid-connected or island-mode."

Hicrogrid Configuration

- Consumer Microgrid—single consumer with demand resources on consumer side of the point of delivery, (e.g. sports stadium)
- Community Microgrid— multiple consumers with demand resources on consumer side of the point of delivery, local objectives, consumer owned, (e.g., campus, etc.)
- Utility Microgrid—supply resources on utility side with consumer interactions, utility objectives

Key Attributes

- Grouping of interconnected loads and distributed energy resources
- 2. Can operate in both island mode or gridconnected
- 3. Can connect and disconnect from the grid
- 4. Acts as a single controllable entity to the grid

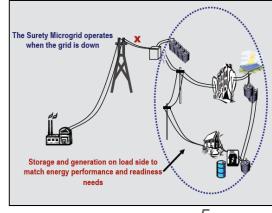

Micro Grid with DG

- BG/DR/DER (Distributed Generation/Distributed Resources/ Distributed Energy Resources) dispersed generations and energy resources at the MV and LV level. Examples include diesel gen-set, CHP, PV, Fuel-cell, energy storage, and dispatch-able loads.
- Hicro grid is an architecture for aggregating multiple DG assets and managing them as a single entity like a virtual power plant.
- A micro grid can connect to the power grid operated by utility companies, or it can exist in isolation. In the grid-connected case, power may flow in either direction between the grid and the micro grid via the Point of Common Coupling (POCC).

Campus Micro Grid

- Energy Management System
- **%** Solar, Wind, and Biomass energy
- **#** Grid-connection

Industry/farm Micro Grid

#Process and administration

HBiomass, Wind energy



Off-Grid and Island Micro Grid

KNo grid connection

Solar, Wind focused

Utility Micro Grid

H Power company

 \Re Solar, Wind, CHP energy \rightarrow grid

Micro Grid - Control

- ₭ Micro grid controller
- **%** Load Residential and Industrial
- **#** Generation Hydro, Diesel, Solar, and Hydrogen

Micro Grid Control & Optimization

- Hicro grid Control System automates and optimizes the use of distributed energy resources (DER) such as conventional generations, renewable-based generations, energy storages, and dispatchable loads.
- Optimization of a microgrid involves coordinating the timing and selection of dispatchable DER with the non-dispatchable ones (such as renewable resources) to minimize energy cost or emission.

Micro Grid Optimal Dispatch

Hicro grid controller determines a set of dispatch decisions by applying the cost objective against the constraints, and the dynamic state of micro grid such

as

- the current output power levels of generators,
- the input/output power levels of storage
- the state-of-charge of each energy storage unit, etc.
- Hereis the decisions are translated into specific DER actions such as on/off control and power reference setpoints.
- Heriodically to follow the evolving dynamics of the micro grid.

Micro Grid at Aomori

- 8 Aomori Project (Japan): Electricity and Heat Supply
- Solar + Wind (totaling 100kW); 510 kW Gen-sets (burning sewage digest gas); 100kW Battery bank
- 1 Ton/Hour Woody Biomass Boiler; Main Grid: 6 kV distribution
- **Primary Energy Consumption Reduction 57%; Carbon Emission Reduction 48%**

Micro Grid at Ramea

- Ramea (a remote locality in Canada) Integrated Wind-Diesel Project
- ₭ Medium wind penetration: 395 kW
- Heak load 1.2 MW

Micro Grid at BC Hydro

- 🔀 BC Hydro Boston Bar microgrid
- 8 69/25kV substation
- # 1 Feeder: 8.64MW-islanded run-of-river Hydro unit
- ₭ Peak load: 3 MW



Micro Grid at Palmdale

- 8 Palmdale Water District (Palmdale) in California
- 8 1000kW Diesel back-up genset; Pump station loads: 760 kW
- Here and the second sec
- Bistributed energy resources: 950 kilowatt wind turbine, a 200 kilowatt natural gas generator, and a 250 kilowatt water turbine generator



Micro Grid in UAE

- Hold Habi (UAE) Project
- 8 Powered by renewable electricity --- island based renewal microgrid
- 8 Plan: Control system, energy storage, DC distribution, Solar PV, Wind, and Biofuel.
- Cooperation with South Korea's Research Institute for industrial Science and Technology, and is being supported by around \$1 million in funding from steel producer POSCO.

UAE-GGGI launches a Public-Private Partnership Project to Design 100% Renewable Energy Micro-grid

Abu Dhabi-UAE: 16 September, 2012





Micro Grid in UAE with GGGI

Elements for UAE Microgrid System



Elements		Functions & Remarks
Energy Sources	PV power	 Zero emission power source Consideration of climate and geometric condition
	Wind power	- Small wind power
	ESS	 Night time energy source (Energy storage and grid stabilizing)
	Micro turbine	- Emergency dispatch power source (using bio diesel from Algae farm)
Smart Meter		 Real-time remote metering Bi-directional information exchange and consumer load control
EV Charging Station		- zero emission vehicle and Boat
Energy Management System (EMS)		 Macro grid connection control Consumer demand monitoring and demand response control Weather information based demand prediction Grid operation optimization and stabilization Battery storage control (charge and discharge control) Desalination plant operation using surplus energy
Network & Security		 Full connectivity for each unit (information & control network) Economic and expandable network configuration
Desalination plant		 To use surplus energy efficiently Water storage
Bio energy plant		- Algae farm and Bio-fuel production

Micro Grid Project – SDG&E

MicroGrid Selected Site: Borrego Substation

Key Characteristics:

Strengths:

- No residences nearby, plenty of land
- More Existing Solar Customers
- Large Reliability Improvements Possible
- Possibility of 'Islanding' Entire Community
- Great learning environment
- Extendable to service territory

Challenges:


- Remote Area
- Challenging Communications Environment
- New Fencing Required
- Requires Accelerating schedule for Condition Based Maintenance and AMI Deployment

Borrego offers SDG&E an opportunity to be the leader in the Micro Grid area, with the possibility of being able to island an entire substation with peak load of over 10 MW.

Sempra Energy utilities

Circuit Diagram - Illustration

- How Two(2) 1.8 MW Diesel Generators (200 hours per year)
- # AES System Battery: 1.0 MW power output and 6.0MW-Hr of energy
- 3 25-50kW 1-3 Hour storage Battery
- 300-300kW 3 hour storage battery

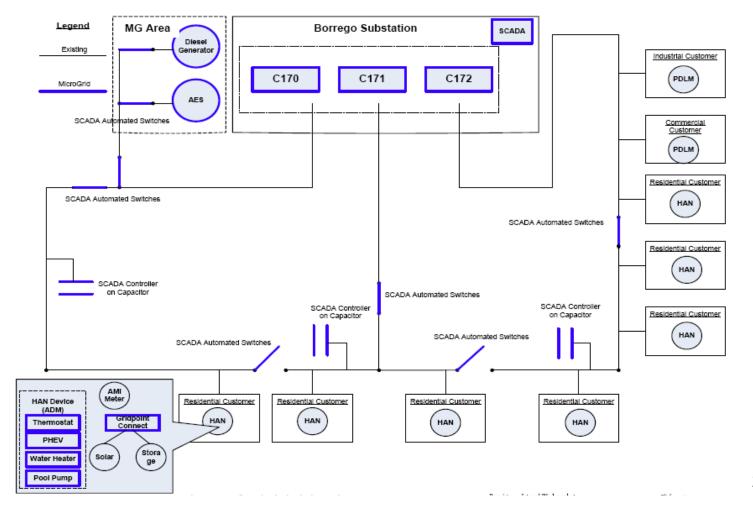


Future Smart Grid with Micro Grids

Hug-and-play integration of smart micro-gridsCommunication, data, and power exchange

A new way-out (from the Smart Grid bubble?)

- **Harge utilities' position on renewables**
 - Obligation
 - Security obstacles
 - Regulatory obstacles
- Smaller System
 - △ Dual fuel option: liquid fuels from oil and high renewable peneteration

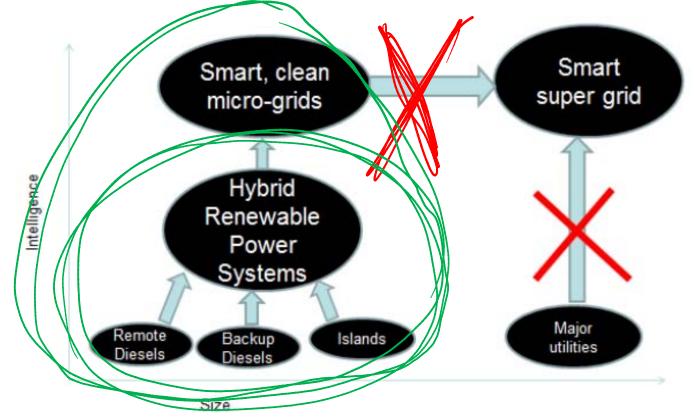


Island Micro Grid

₩Why islands?

- Renewables compete with oil, not gas
- Power being used at point source without regulation
- Wind (Solar)-Diesel: for large communities of facilities with large loads
- Don't need incentives or subsidies
- △Don't need transmission access
- High renewable contributions
- - ≥ Patience with new technology
 - **E**Logistics
 - Cultural issues

Future on Islands


- Islanders: high and variable energy costs; Excellent access to renewables
- LCOE: Levelized Cost of Energy Islands can lead the way

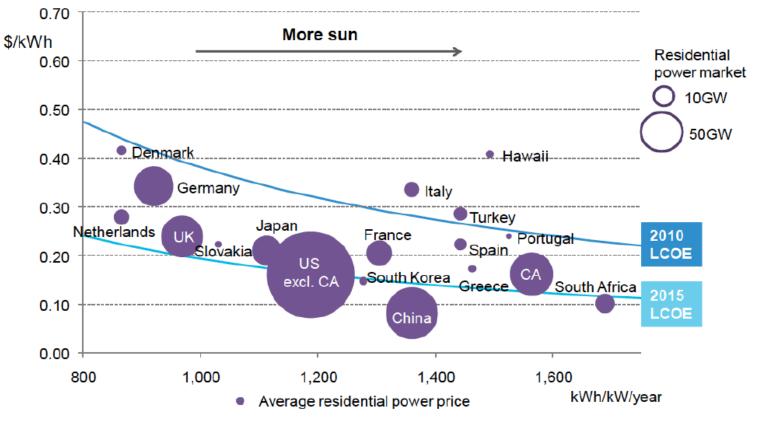

Michael Liebreich, Bloomberg New Energy Finance

³¹

PV Diesel Cost -- Projection

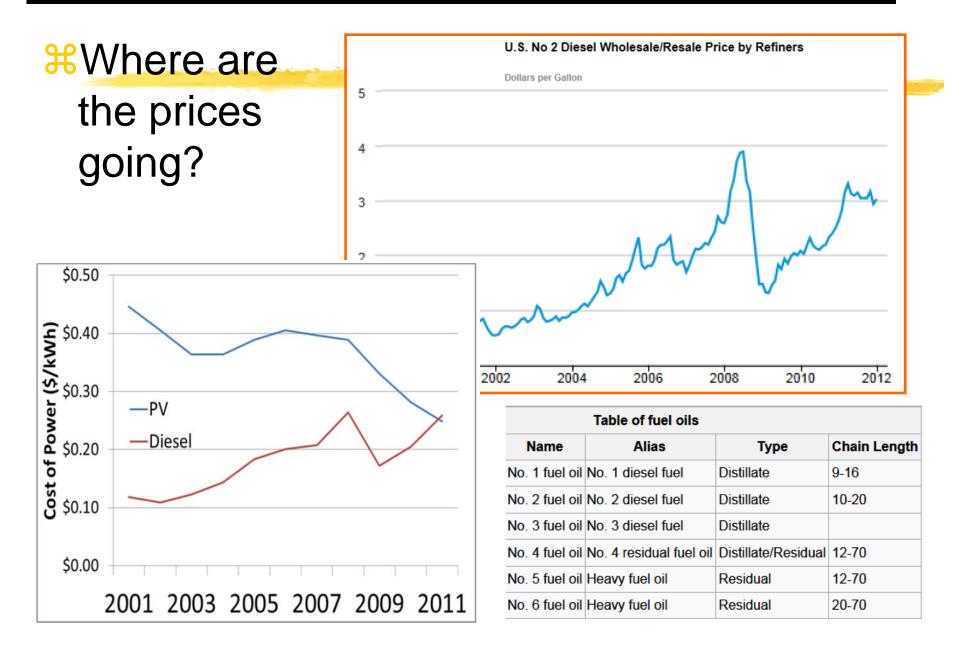

Island Interconnection

- **B** Deliver lower cost power from one island to another
- H Transmit renewable generated energy to an island that otherwise does not have access to less expensive renewable power
- **K** Increased reliability, better power quality, better hurricane resilience
- Integrated fiber-optic cables

Oahu	
Oahu 600MW of new Renewables ~1200MW Peak	
~1200MW Peak	

Hawaii Projects

S-Japan Maui Smart Grid

integration of variable renewable

energy resources on islanded grid with widespread adoption of electric vehicles

- International cooperation public/private partnership
- 200 EVs with home charging + public fast charger network

Hawaii – Korea Smart Grid Proposal

- Collaboration with hotel industry on Oahu
- focus on energy use in large commercial buildings with integrated renewable energy and electric vehicle charging

Micro Grid ("Micropower System") Planning & Design

% 1. Identify Site:

- ☐ Clarify the goals of the microgrid:
 - What are the critical facilities that must be included in the microgrid?
 - What are the thresholds and how long should a utility disturbance persist before transitioning to islanded mode?
 - What is the maximum amount of time the microgrid must operate?
- ➢ Factors impacting microgrid Capabilities:
 - Site mission
 - Geographic relationship of facilities and site electrical distribution system layout/characteristics
 - Existing standby generation capacity and controls
 - ☑Availability and feasibility of renewable resources
 - Building management & control systems/ load control schemes
 - ⊠Utility standards and response to microgrid proposal

Load Profile


₭ 2. Load Study

Load Profiles – annual and daily peak and seasonal behavior

Operational equipment data

Critical and Sensitive load to power quality


Flexibility of load to adjust and match available generation

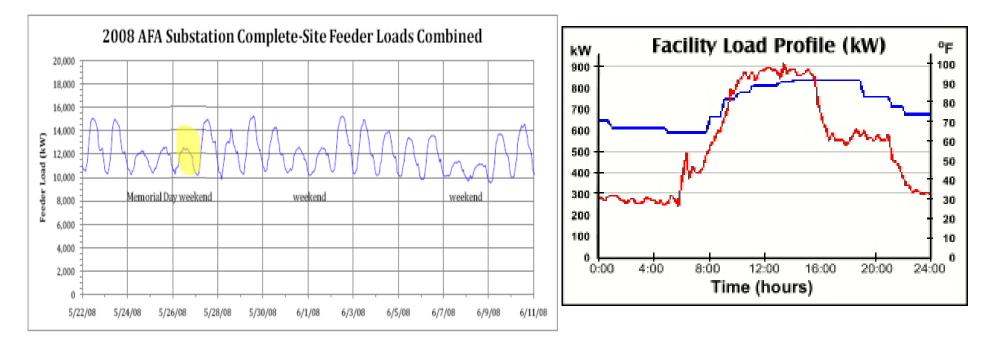


DG Resources

#3. DR and Energy Storage Study


- PV, Wind, etc for renewable sources
- Coverage required for microgrid footprint
- Existing standby generation characteristics
- Proposed/funded generation projects
- Fuel inventory and duration requirements
- Dispatchability to intermittency ratio
- Distributed storage considerations –location, technology, capacity, & duration

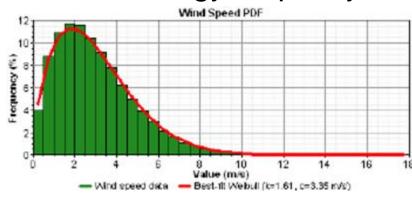

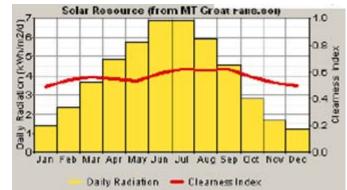

Meeting the Load

- ₭ 4. Generation-Load Match Study
 - Can existing/projected generation capacity meet the proposed peak load and daily operating requirements?
 - Can dispatchable resources handle transient disturbances on the system while maintaining satisfactory voltage and frequency?
 - Can existing dispatchable generation compensate for the variability of renewable resources?

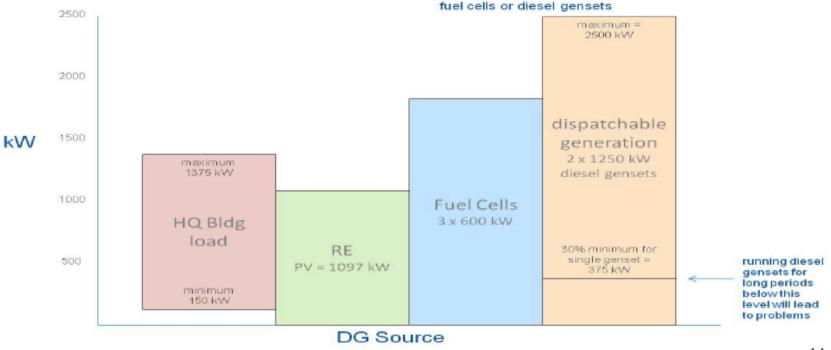

Control Methods

8 5. Develop Control Strategy

- Appropriate control strategies for self regulation load and generation dispatch
- Include both grid–connected and islanded conditions
- Control of utility interface (i.e., static transfer switch) to handle seamless separation and reconnection to utility power
- Utility requirements (monitoring and/or control of interface)
- Local /central control schemes to monitor & control DR and loads
- Interface with building energy management system(s)
- Integration with existing legacy communication systems/software
- Address security concerns –cyber & physical
- ☐ Integration with existing protection schemes

Component Study

₭ 6. Equipment Study

Engineering analysis

Modeling and Simulation under various scenarios

∧ Now, HOMER finally comes in here !!!

